

CARBOFRESH®

...perfect CO₂ dosage in wine

Carbon dioxide is known as one of the major refreshing and taste impacting ingredients of wine (beer or soft drinks).

Effective adjustment of the carbonation level (carbonation for white and rose wines, or CO₂ reduction for red wines) is an important process step in adjustment & production of the optimal wine quality.



Quality improvement in white and rosé wines

The unique incorporation of fine carbon dioxide bubbles lends freshness and lightness to the flavour and body of wines. Even with dense and voluminous wines, it imparts aromas. The subtle carbon dioxide bubbles make white and rosé wines fresher, livelier and aromatic.

De-carbonation and CO₂ adjustment in red wines

Excess and disturbing carbon dioxide can be removed from red wines. Instead of charging with carbon dioxide, plain nitrogen is used. The Carbofresh® processor makes it easy to adjust the optimal content of carbon dioxide in wines. The wine is simply passed through the system and conveyed unpressurized into the tank.


The device works purely pneumatically and doesn't need any electric energy supply. The desired carbon dioxide concentration is set directly at the device itself. If product flow drops below a minimum flow rate, the device is automatically deactivated. When the product flow increases, carbonation is activated again.

BENEFITS:

- Quick return of investment
- Low maintenance requirements
- Accuracy and consistency of product quality
- Easy installation and operation
- No electrical connections or control modules
- High efficiency
- Automatic activation / deactivation

OPERATION:

A feed pump (not included) presses the beverage through a built-in venturi injector, where the desired amount of CO₂ is added. The CO₂ bubbles dissolve in the downstream mixing stage.

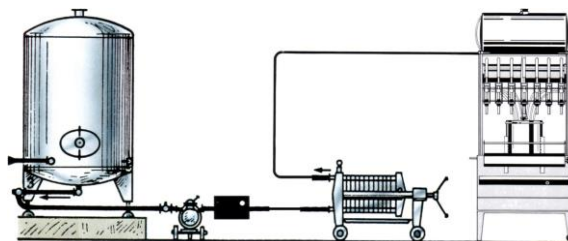

TECHNICAL DATA:

Flow rate: 1.000 - 30.000 l/h
(depending on injector size) (265 – 7833 gal/h)

CO₂ concentration: 0-1.8 g/l / 0-0.8 vol
(continuously variable, temperature-dependent)

Required feed pump pressure: ≥ 6 bar / 87 PSI

Maximum operating pressure: 7 bar / 102 PSI

CO₂ supply pressure: 7 bar / 102 PSI

Dimensions (LxHxD) in mm: 300 x 160 x 100
inch: 11.8 x 6.3 x 3.9

Pressure loss: approx. 0.7–2.0 bar
(10 – 29 psi)

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93